

# P3DC12-16-10

12VDC, 16 OUTPUT, 10 AMP CCTV POWER SUPPLY




The P3DC12-16-10 power supply is engineered to manage remote camera and accessory power requirements for various CCTV or general security applications. The P3DC12-16-10 is designed with sixteen (16) individually fused, non-power limited outputs of 12VDC. Each unit is housed in a premium heavy gauge, front spring loaded, locking enclosure.

## FEATURES

- Convenient screw terminal and fuse access
- Power ON/OFF switch
- AC power LED indicator (Green)
- Individual output LED indicates power is present (Red)
- Easy to identify automotive style fuses
- Front spring loaded, locking, side vented, heavy gauge metal enclosure
- Double coated polyurethane finish
- Knock-out for cam-lock
- Multiple 1" knock-outs to accommodate various wiring configurations
- Also available with optional PTC protected outputs - **P3DC12-16-10CB**

## SPECIFICATIONS

- Input 115VAC 50/60 HZ: 2.5A
- Output: 10A @ 12VDC - electronically filtered and regulated
- Individual output fuses are rated at 3A
- Main fuse is rated at 10A
- Built-in charging circuit for sealed lead acid batteries
- Transformer includes built-in thermal protection
- Voltage can be adjusted +/- 10% to compensate for long wire runs
- Maximum temperature range: 32°F to 120°F (0°C to 49°C)
- Ideal operating temperature: 70°F (21°C)
- For indoor use only
- Enclosure dimensions: 15.5" (H) x 13" (W) x 4.5" (D)
- Shipping weight: 23 lbs

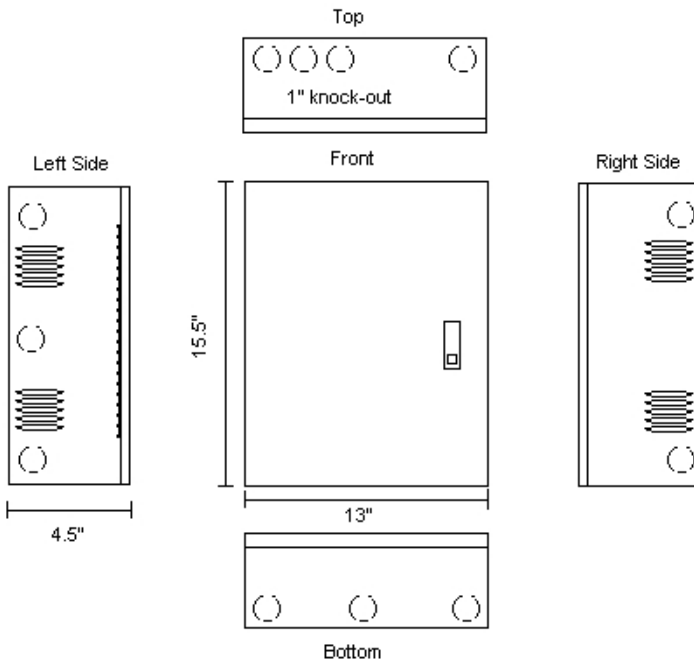

1-877-478-4733

WWW.PTHREE.COM

*\*Specifications subject to change without notice*