


V5A4B

V-SERIES - 12VDC, 4 OUT, 5 AMP CCTV POWER SUPPLY

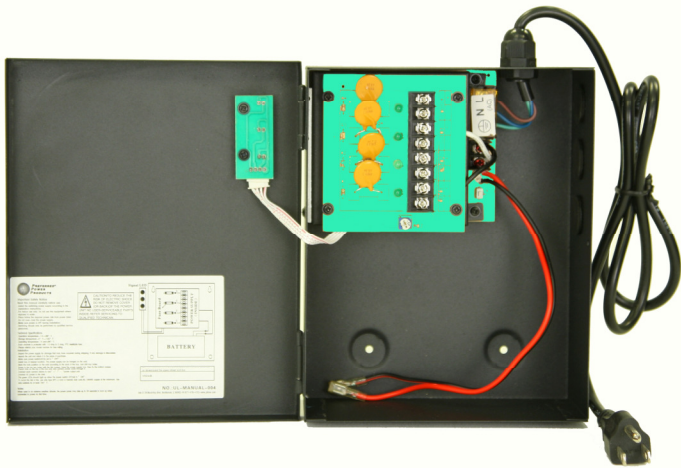


The V5A4B is a low cost, professional, UL Listed CCTV power supply. The V5A4B is engineered to provide power for remote CCTV cameras that require 12VDC power. The V5A4B is designed with four (4) PTC protected, power limited outputs at 12VDC. 5 Amp total draw. The V5A4B also features a built-in charging circuit for seal lead acid batteries.

FEATURES

- Convenient screw terminal access
- AC power LED indicator (Yellow)
- Individual output LED indicates power is present (Green)
- Battery Charging LED - (Red)
- Auto-resetting PTC protected outputs
- Light weight, low profile enclosure
- Built-in charging circuit for sealed lead acid batteries
- Multiple 3/4" knockouts
- Factory installed grounded power cord for easy installation

SPECIFICATIONS

- Input 120VAC 60 HZ: 1.5A
- Output: 5A @ 12VDC - electronically filtered and regulated
- Individual PTC's are rated at 1.25A
- Short circuit and thermal overload protection
- Built-in charging circuit for sealed lead acid batteries
- Maximum temperature range: 14 °F to 86 °F
- Ideal operating temperature: 70 °F (21 °C)
- For indoor use only
- Enclosure dimensions: 7.75" (H) x 6.25" (W) x 2.75" (D)
- Shipping weight: 2 lbs
- 2 Year Warranty
- Agency Approvals:

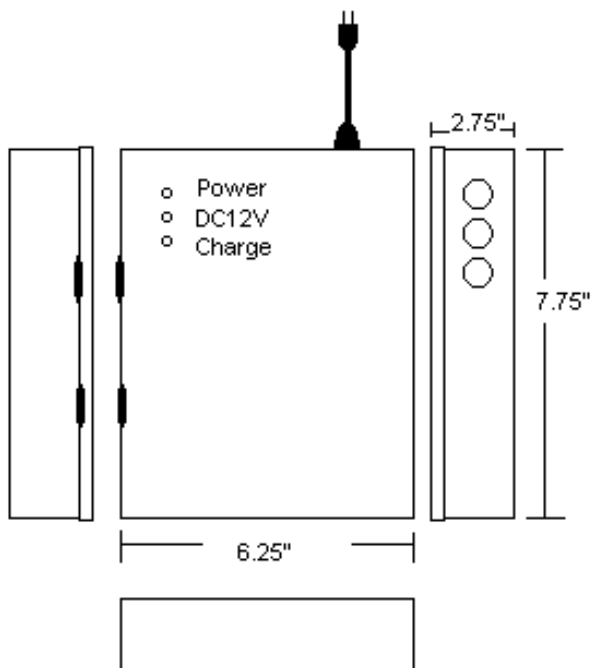

1-877-478-4733

WWW.PTHREE.COM

*Specifications subject to change without notice